


SP120W-18V MONO & POLYCRYSTALLINE

Key features:

- 
PID Free Module:
Anti-PID cell and encapsulation technology
Frameless module requires no module grounding which may PID.
- 
Higher Lifetime Power Yield:
+0.5% annual power degradation
30 year linear power warranty
- 
Saving BOS Cost:
Designed for high voltage systems of up to 1000 VDC saving BOS cost
- 
Improved Durability and Reliability:
Dual glass reduces micro-cracking, steel frame, corrosion caused by moisture, salt, salt fog, acid rain, etc.
- 
Less Maintenance Requirement:
Reduced soiling and shade coverage requires less maintenance and enhances fire safety
- 
Aesthetically Pleasing Design:
With back sheet maximum module efficiency up to 18.84% (STC) and max. output (270V). Transparent back sheet increases light transmission, ideal for installation requiring light to pass through.
- 
Strengthened Mechanical Support:
500 Pa snow load, 2400 Pa wind load

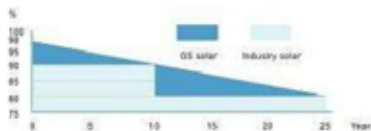

Module Models


Electrical Specifications

Model	SP120W-18V
Peak power(Pmax)	120W
Cell Efficiency	16.93%
Max. power volt.(Vmp)	17.5V
Max. power current(Imp)	6.86A
Open circuit volt. (Voc)	21.8V
Short circuit current(Isc)	7.43A
Power Tolerance	±3%
Max. system voltage	1000V
Series fuse rating(A)	10
Number of bypass diode	2
Operating temperature	-4°C to +85°C
Maximum system voltage	1000V DC

STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Mechanical Characteristics

Dimensions	1200*670*30mm
Weight	9.2kg
Solar Cells	36 cell in series
Cable	LAPP (2.5mm ²)
lengths	700mm(-) and 700mm(+)
Connector	Mc4 Plug Type
Glass type	High transmits, Low Iron, 3.2mm Tempered Glass
Frame	Aluminium-alloy

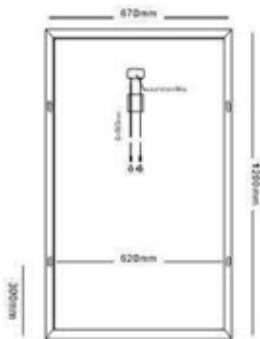

Module Diagram