


TWINSEL

HIGH PERFORMANCE
BIFACIAL PERC MONOCRYSTALLINE MODULE

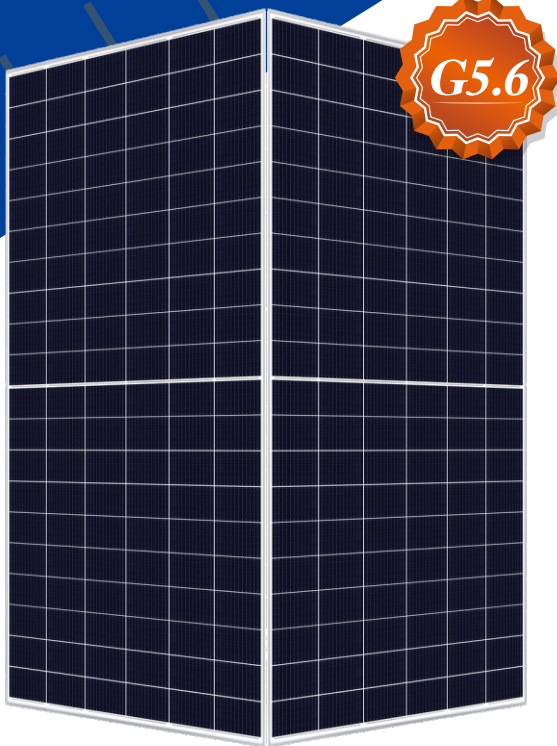

RSM120-8-580BMDG-600BMDG

120 CELL

Mono PERC Module

580-600Wp

Power Output Range

1500VDC

Maximum System Voltage

21.2%

Maximum Efficiency

KEY SALIENT FEATURES



Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing



Bifacial technology enables additional energy harvesting from rear side (up to 30%)



Industry leading lowest thermal co-efficient of power



Excellent low irradiance performance



Excellent PID resistance



Positive tight power tolerance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses





Excellent wind load 2400Pa & snow load 5400Pa under certain installation method



Comprehensive product and system certification

- ◆ IEC61215:2016; IEC61730-1/-2:2016;
- ◆ ISO 9001:2015 Quality Management System
- ◆ ISO 14001:2015 Environmental Management System
- ◆ ISO 45001:2018 Occupational Health and Safety Management System

Dimensions of PV Module Unit: mm

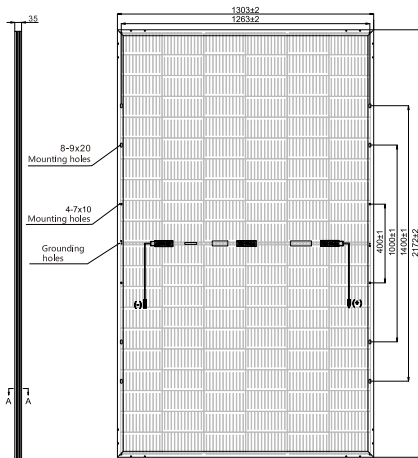

ELECTRICAL DATA (STC)

| Model Number | RSM120-8-580BMDG | RSM120-8-585BMDG | RSM120-8-590BMDG | RSM120-8-595BMDG | RSM120-8-600BMDG |
|-------------------------------|------------------|------------------|------------------|------------------|------------------|
| Rated Power in Watts-Pmax(Wp) | 580 | 585 | 590 | 595 | 600 |
| Open Circuit Voltage-Voc(V) | 40.90 | 41.10 | 41.30 | 41.50 | 41.70 |
| Short Circuit Current-Isc(A) | 18.06 | 18.11 | 18.16 | 18.21 | 18.26 |
| Maximum Power Voltage-Vmpp(V) | 34.04 | 34.22 | 34.42 | 34.60 | 34.80 |
| Maximum Power Current-Impp(A) | 17.05 | 17.10 | 17.15 | 17.20 | 17.25 |
| Module Efficiency (%) ★ | 20.5 | 20.7 | 20.8 | 21.0 | 21.2 |

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor: 70%±5 ★ Module Efficiency (%): Round-off to the nearest number

Electrical characteristics with 10% rear side power gain

| | | | | | |
|-----------------------------------|-------|-------|-------|-------|-------|
| Total Equivalent power -Pmax (Wp) | 638 | 644 | 649 | 655 | 660 |
| Open Circuit Voltage-Voc(V) | 40.90 | 41.10 | 41.30 | 41.50 | 41.70 |
| Short Circuit Current-Isc(A) | 19.87 | 19.92 | 19.98 | 20.03 | 20.09 |
| Maximum Power Voltage-Vmpp(V) | 34.04 | 34.22 | 34.42 | 34.60 | 34.80 |
| Maximum Power Current-Impp(A) | 18.76 | 18.81 | 18.87 | 18.92 | 18.98 |

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

| Model Number | RSM120-8-580BMDG | RSM120-8-585BMDG | RSM120-8-590BMDG | RSM120-8-595BMDG | RSM120-8-600BMDG |
|--------------------------------|------------------|------------------|------------------|------------------|------------------|
| Maximum Power-Pmax (Wp) | 439.5 | 443.1 | 447.0 | 450.7 | 454.6 |
| Open Circuit Voltage-Voc (V) | 38.04 | 38.22 | 38.41 | 38.60 | 38.78 |
| Short Circuit Current-Isc (A) | 14.81 | 14.85 | 14.89 | 14.93 | 14.97 |
| Maximum Power Voltage-Vmpp (V) | 31.59 | 31.76 | 31.94 | 32.11 | 32.29 |
| Maximum Power Current-Impp (A) | 13.91 | 13.95 | 13.99 | 14.04 | 14.08 |

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA



| | |
|--------------------|---|
| Solar cells | Monocrystalline |
| Cell configuration | 120 cells (6×10+6×10) |
| Module dimensions | 2172×1303×35mm |
| Weight | 35kg |
| Superstrate | High Transmission, Low Iron, Tempered ARC Glass |
| Substrate | Tempered Glass |
| Frame | Anodized Aluminium Alloy type 6005-2T6, Silver Color |
| J-Box | Potted, IP68, 1500VDC, 3 Schottky bypass diodes |
| Cables | 4.0mm ² (12AWG), Positive(+)/350mm, Negative(-)/350mm (Connector Included) |
| Connector | Risen Twinsel PV-SY02, IP68 |

TEMPERATURE & MAXIMUM RATINGS

| | |
|---|-------------|
| Nominal Module Operating Temperature (NMOT) | 44°C±2°C |
| Temperature Coefficient of Voc | -0.25%/°C |
| Temperature Coefficient of Isc | 0.04%/°C |
| Temperature Coefficient of Pmax | -0.34%/°C |
| Operational Temperature | -40°C~+85°C |
| Maximum System Voltage | 1500VDC |
| Max Series Fuse Rating | 35A |
| Limiting Reverse Current | 35A |

PACKAGING CONFIGURATION

| | |
|--|----------------|
| | 40ft(HQ) |
| Number of modules per container | 527 |
| Number of modules per pallet | 31 |
| Number of pallets per container | 17 |
| Packaging box dimensions (LxWxH) in mm | 1350×1145×2310 |
| Box gross weight[kg] | 1130 |

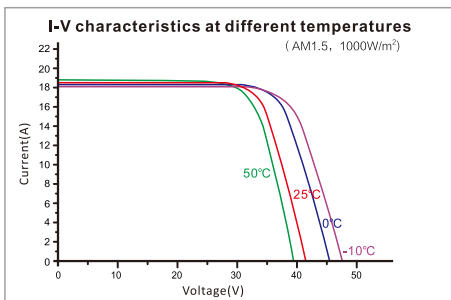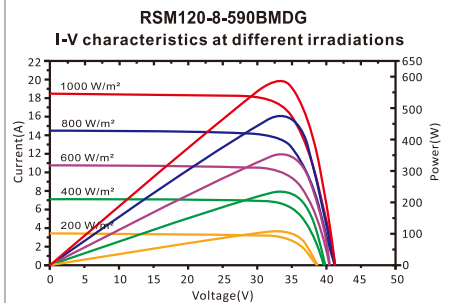

Our Partners: